


MEDMASTER CLEANSCENE™

CS SERIES

PRODUCT FEATURES:

- » Recessed ceiling mount – grid; 4'x4'
- » Expansive offering of high quality graphic images
- » Antimicrobial finish option available
- » Regressed frame kit available for even more aesthetic appearance

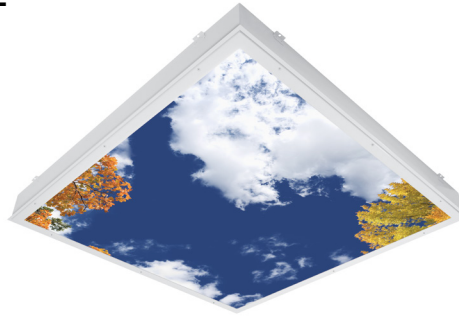

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 18-gauge aluminum. Hole-free one-piece seam welded construction. White TGIC polyester powder coat standard – 5-stage pre-treatment. Salt spray test: 1,000 hours. Antimicrobial finish optional on all exposed painted surfaces of installed luminaire.

DOORFRAME: 18-gauge aluminum. One-piece inset construction welded corners. TGIC polyester powder coat standard – 5-stage pre-treatment. Salt spray test: 1,000 hours. Antimicrobial finish optional on all exposed painted components of installed luminaire. Doorframe secured to housing with aircraft cables and 8 captive mounted Phillips-head stainless steel fasteners. Closed cell Neoprene/EPDM/SBR gasket seals doorframe to housing.

LENS: .177" acrylic lens secured with continuous lens retention system.

REGRESSED FRAME KIT (ACCESSORY): One-piece, .08" thick, seamless aluminum construction TGIC polyester powder coat finish in matte white or black. Provides easy-to-install, architectural skylight effect by raising fixture 2-inches above standard 1" or 1.5" T-bar grid ceiling.

ELECTRICAL: High-brightness, 6500K LED light source. 120-277VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (0.95 PF). Standard 0-10V dimming with 1-100% range; 250µA maximum source current. EMC meets FCC Part 15, Class A limits. Consult factory for fluorescent options.

SENSOR & CONTROLS: Optional sensor available with compatible third party controls. To see the full list of compatible controls, click [here](#).

INSTALLATION: Designed for 1" and 1.5" grid. (Housing includes hanging brackets to secure housing with wire to super structure).

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. NSF2 Splash/Non-Food Zone.





ORDERING INFORMATION (Ex: CS44-G10-1-26L65K-120-PAFW-PAH-AMF-RFK44W)

| Model | Mounting | Lamp Qty | Lamp Type | Voltage | Frame Type | Housing Option | Options | Accessory | Image Selection |
|---------------------------------|----------|----------|---------------|------------------------------------|------------|--|---------|---|-----------------|
| CS44 | | 1 | 26L65K | | | PAH | | | |
| Mounting Options | | | | Voltage | | Housing Options | | Accessory | |
| G10 Grid (1") | | | | 120 120 Volts | | PAH .050" Painted Aluminum | | RFK44W Regressed Frame Kit – White | |
| G15 Grid (1.5") | | | | 277 277 Volts | | | | RFK44B Regressed Frame Kit – Black | |
| Lamp Quantity | | | | Frame Type | | Options | | Image Selection | |
| 1 One System | | | | PAFB Black Painted Aluminum | | AMF Antimicrobial Finish (All Exposed Surfaces) | | Click here for CleanScene lightbox image selections and ordering numbers. Consult factory for alternate image selection approval. | |
| Lamp Type | | | | PAFW White Painted Aluminum | | | | | |
| 26L65K 26 Watt 6500K LED | | | | | | | | | |

* n/a with Dual Voltage (DV)

DIMENSIONAL DATA

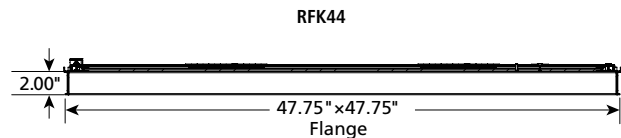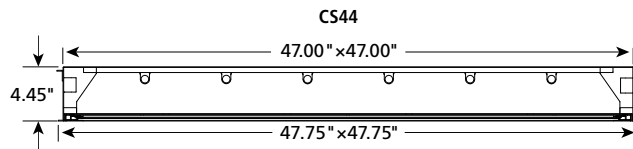

GRAPHIC IMAGE SIZE NEEDED – 4x4 FIXTURE

- Grid 1.0 (G10)** 44.575" x 44.575"
- Grid 1.5 (G15)** 44.075" x 44.075"

*Subtract .50" from housing width and length when 1.5" grid mounting option is specified.



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.