


STRATALUME™

UC SERIES

PRODUCT FEATURES:

- » 5" W x 1.75" H x 2', 3', 4' or 5' L
6" W x 2" H x 2', 3', 4' or 5' L
- » Undercabinet lighting
- » 20-gauge CRS steel housing with choice of solid front or wraparound lens

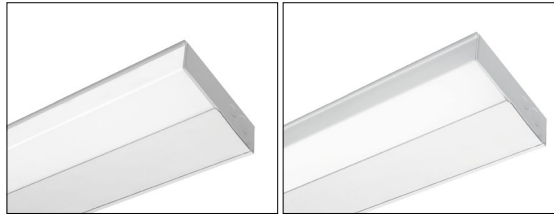

UCDD

UCSD

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: 20-gauge CRS. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Conduit access at ends, top and back of housing. Flush end design for continuous row mounting. See Options for stainless steel type 304 brushed housing (SSH).

LENS: UCDD: High impact, extruded wraparound opal diffuser – 100% DR acrylic. Nominal thickness .065". Pliable non-yellowing lens material snaps in place for quick relamping. UCSD: Flat P12 prismatic acrylic lens. Nominal thickness .125". Pliable non-yellowing lens material lies in place for quick relamping.

ELECTRICAL: Class P and ETL/CBM certified. See Options for integral 120 V Cord & Plug (CP). See Accessory for field installed 120 V Cord & Plug (CPA).

INSTALLATION: Multidirectional keyhole mounting slots – see Cross Section/Details.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.


LISTINGS: UL and CUL listed for Damp Location. Lifetime warranty against defects in workmanship and materials (lamps excluded) for product life of original installation.



ORDERING INFORMATION (Ex: UCSD-24-IS-120)

Model	Length/Lamp	Ballast	Voltage	Options	Accessory
Model	Length/Lamp	Ballast	Voltage	Options	
UCDD Luminous Front	24 2' one 17 Watt (F17T8)	IS Instant Start Electronic <10% THD		BW Batwing Distribution Lens (UCSD only)	
UCSD Solid Front	36 3' one 25 Watt (F25T8)	RS Rapid Start Electronic <10% THD		CO 120V Convenience Outlet – Non-GFI Receptacle	
	48 4' one 32 Watt (F32T8)	SB Specified Ballast		CP Cord & Plug (120V only) (specify left, right, top, or back location)	
	60 5' one 40 Watt (F40T8)			FS Single Fuse & Holder	
		Voltage		MS Motion Sensor	
		120 120 Volts		SSH Stainless Steel Type 304 Brushed Housing	
		277 277 Volts		SW Rocker Switch	
				Accessory	
				CPA Cord & Plug Wiring Kit (120V only)	

DIMENSIONAL DATA

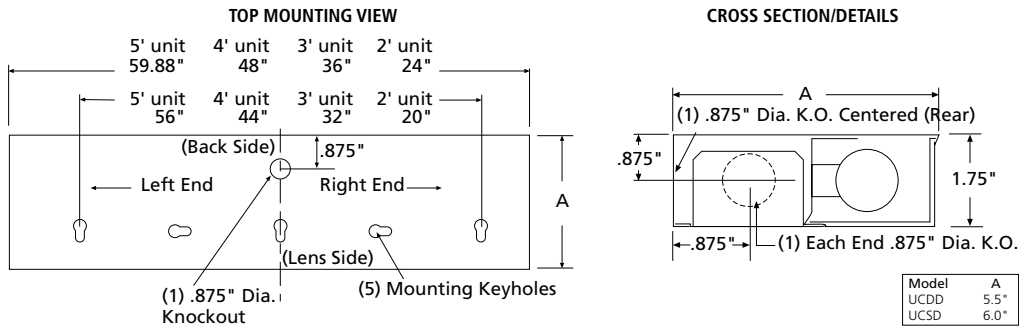

www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product can comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **legrand**