

FN & FNU SERIES

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed, including the following:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. DISCONNECT POWER TO ALL CIRCUITS BEFORE WIRING FIXTURE. INSTALL IN ACCORDANCE WITH ALL NATIONAL, STATE, AND LOCAL CODES. DO NOT CONNECT TO AN UNGROUNDED SUPPLY. READ ALL FIXTURE MARKINGS AND LABELS TO ENSURE CORRECT INSTALLATION OF FIXTURE. SUPPLEMENTAL INSTRUCTIONS MAY BE LOCATED ON THE FIXTURE, IN ADDITION TO THIS INSTRUCTION SHEET, REGARDING ORIENTATION, OR MOUNTING RESTRICTIONS.

SAVE THESE INSTRUCTIONS


PRODUCT INSTALLATION

1. Read all fixture markings and labels to insure correct installation of the fixture. Additional information may be located on the fixture, separate from this instruction sheet, regarding orientation and mounting restrictions.
2. Disconnect power to main circuits before wiring fixture.
3. Connect provided wiring harness (with 3-wire connector) to supply wires.
4. Place quick mounting plate over J-box; Use a level on top edge of the plate to ensure levelness. Mark hole locations and drill pilot holes as needed.
5. Install quick mounting plate as shown with four appropriate 1/4" fasteners (by others).
6. Attach 3-wire connectors.
7. Hook fixture to top edge of the quick mounting plate and secure with two fasteners from the bottom.

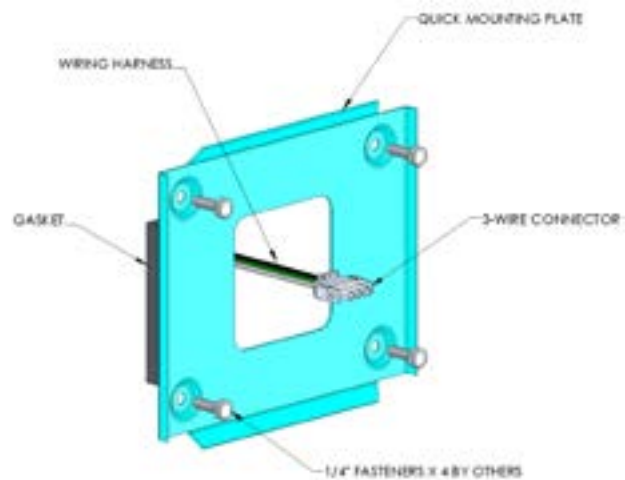

SURFACE ADAPTER INSTALLATION

1. Figures are shown for down lighting. Rotate 180 degrees for up lighting. See marking in SA for proper orientation.
2. Gasket is used for back wiring entry.
3. For side conduit feed, remove and reuse plug. Use sealing compound for rain tightness.
4. Connect ground wire (green) of the wiring harness (supplied with fixture) to SA.
5. Install SA as shown in Figure 1 with four appropriate 1/4" fasteners (by others).
6. Install quick mounting plate as shown in Figure 2 with four provided fasteners to the SA.
7. Refer to F-2498 for continuation of the fixture installation.

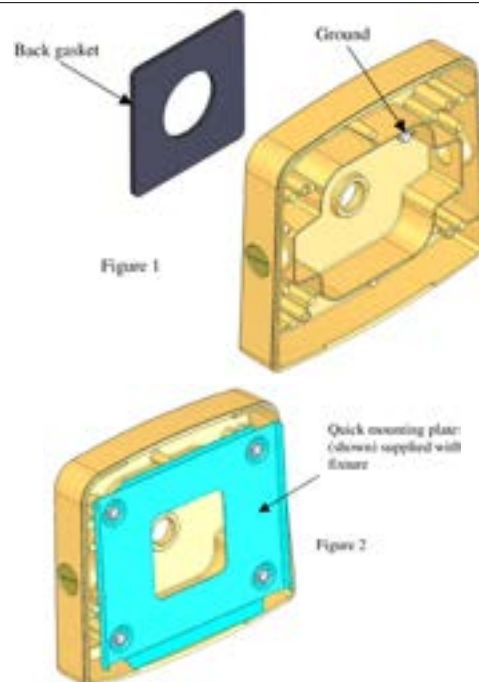

CUSTOMER SERVICE

For technical assistance, call 1-800-4KENALL (1-800-453-6255).

WARRANTY

For warranty information visit www.kenall.com/Resources/Certified-Performance-Warranties



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.

A brand of  **legrand**

FN_FNU_F-2498_090418