

MEDMASTER™

Luminaires for Behavioral Health Applications

BHWB SERIES

PRODUCT FEATURES:

- » Wall-mounted luminaire with bi-directional (up/down) distribution
- » Bullnose profile with sloped sides for reduced patient injury risk
- » One-piece, TIG-welded outer housing with reinforced, continuous lens retention
- » High-output, high-CRI LED lamp sources
- » Available integral low-voltage controllers for wall- and bed-mounted patient control
- » Ligature resistant construction



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: One-piece, clamshell design using die-formed prime grade material as specified – see Ordering Information. Finished with a matte white TGIC polyester powder coat finish with 5-stage pre-treatment. Continuous seam-welded and smoothed corners with no post grinding (TIG). Housing resistant to penetration and contraband concealment. One-piece concealed lens retention bracket.

OPTICS: High-efficiency diffused, impact-resistant acrylic inner lens with clear polycarbonate or tempered glass outer lens. See Ordering Information for selection options. Maximum 0.375" overall thickness.

LED MODULE: Serviceable mid-power LED array. 3500K, 4000K and 5000K color temperature options with maximum 3-step MacAdam variation allowance. Minimum 82CRI standard (R9>20) with 90CRI (R9>50) optional.

DRIVER: 120-277VAC or 347VAC, 50/60Hz electrical input with serviceable constant-current driver (<20% THD, >0.90 PF). Minimum 85% driver efficiency. Standard 0-10V dimming with 1-100% range and dim-to-dark capabilities (non dim-to-dark with 347V); maximum 165µA maximum source current. Optional eldoLED ECOdrive DALI drivers with 1-100% range. Two-circuit (2C) option allows for independent power and dimming to 'up' and 'down' lamping.

CONTROLS: Optional integral low-voltage controller with (LVCD) and without (LVC) dimming capability through a compatible wall, bed or pillow speaker controller. Refer to hyperlinks within Ordering Information for further details. See 'Accessories' for available low-voltage wall control switches.

INSTALLATION: Wall-mount installation via internal mounting holes using six (6) high-security bolts (provided by others). Tamper-resistant center-pin Torx or Allen-head fasteners secure housing to mounting baseplate.

WARRANTY: Limited five (5) year LED and driver warranty.

LISTINGS: Luminaire is certified to UL Standards by Intertek Testing Laboratory for Damp Location. Ligature resistant construction.



ORDERING INFORMATION (Ex: BHWB-3-0-35L/35L-35K8-DIM1-DV-SYM/9-1-FS)

Model	Length	Hsg. Material	Lamp Power	Lamp Color	Driver Type	Voltage	Lens (Inner/Outer)	Fastener Type	Options
BHWB	3						SYM /		
	Length				Driver Type		Lens (Inner/Outer)		
	3 3' Nominal				DIM1 0-10V Dimming to 1%		SYM † .125" Diffused DR Acrylic		
					DALI DALI Dimming to 1%		G .125" Clear Polycarbonate		
	Housing Material				Voltage		7 .187" Clear Polycarbonate		
	0 14-Ga CRS in Matte White				DV 120-277VAC, 50/60Hz		8 .187" Clear Tempered Glass		
	3 14-Ga Type 304 Stainless Steel in Matte White				347 347VAC, 60Hz (DIM1 only)		9 .250" Clear Polycarbonate		
	Lamp Power						A .250" Clear Tempered Glass		
	24L/24L 24 Watt LED Up / 24 Watt LED Down							External Fastener Type	
	35L/35L 35 Watt LED Up / 35 Watt LED Down							1 Torx Head with Center Pin	
	Lamp Color							2 Allen Head with Center Pin	
	35K8 3500K / 82 CRI min.							Options	
	35K9 3500K / 90 CRI min.							LELST Integral 6W Self-Testing Emergency Battery Backup (n/a 347V)	
	40K8 4000K / 82 CRI min.							FS Single Fuse & Holder	
	40K9 4000K / 90 CRI min.							NLW 2700K White LED Night Light (n/a 347V)	
	50K8 5000K / 82 CRI min.							NLA Amber LED Night Light (n/a 347V)	
								2C Two-Circuit Wiring	
								LVC* Low Voltage Controller (DIM1 only; click here for specifications)	
								LVCD* Low Voltage Controller with Dimming (DIM1 only; click here for specifications)	

† Not available as Outer lens or as standalone lens option
 * n/a with 347V; must also specify 2C option for independent 'up/down' control

ACCESSORIES ORDERED SEPARATELY
MPWS Low Voltage Wall Switch ([Click here for Specifications](#))



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product can comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **legrand**

Luminaires for Behavioral Health Applications


BHWB SERIES

PERFORMANCE

Lamp Power	Initial Delivered Lumens, by CCT (lm)					Efficacy (lm/W)	Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
	35K8	35K9	40K8	40K9	50K8				
24/24L	6,110	5,286	6,230	5,337	6,401	92 - 112	57	94	80,000
35/35L	8,415	7,280	8,580	7,351	8,816	90 - 109	81	131	65,000

NOTE: All products tested with SYM/9 lens configuration. See "Lumen Output Scaling Factor" table for output values with alternate lens configurations. Information subject to change without notice. Visit www.kenall.com for IES files and additional information.

Model: BHWB-3-y-35L/35L-40K8-DIM1-zzz-SYM-9

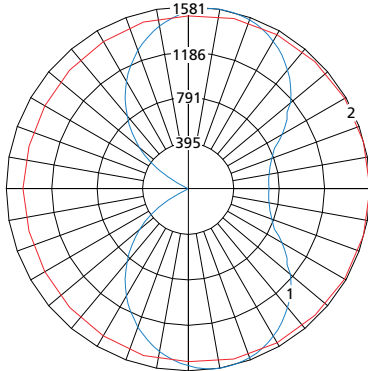

Maximum Candela = 1581 Located At Horizontal Angle = 0, Vertical Angle = 10

- 1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

LUMEN OUTPUT SCALING FACTORS

Lens Configuration	Outer Lens	Scaling Factor
SYM/G	1/8" Clear PC	1.06
SYM/7	3/16" Clear PC	1.03
SYM/8	3/16" Clear TG	1.03
SYM/9	1/4" Clear PC	1.00

NOTE: Use this table to determine the lumen output and efficacy with the desired lens configuration by multiplying the provided value with the appropriate number in the 'Performance' table above.

DIMENSIONAL DATA

