

ENVIROSEAL™

HES5 SERIES

PRODUCT FEATURES:

- » Surface mount – ceiling or wall;
5"×24" (12.70cm×60.96cm), 5"×36" (12.70cm×91.44cm),
5"×48" (12.70cm×121.92cm), 5"×96" (12.70cm×243.84cm)
- » Cold rolled steel or stainless steel housing for corrosion resistance
- » UV-Stabilized polycarbonate lens
- » IP65 Option available
- » Hazardous listed Class I, Division 2, Groups A, B, C D



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: One-piece, seam-welded 20-gauge CRS. Base provided with two-point mounting holes and one wireway hole. Lens is positioned in baseplate channels and retained with stainless steel fastener(s). Base mounts flush to ceiling or wall surface.

LENS/GASKET: UV-stabilized polycarbonate. Smooth exterior, linear prismatic interior. Nominal thickness .125" (.32cm). IP65 option provided with linear silicone gasket to seal doorframe to housing.

FINISH: Brushed stainless steel finish (#4B) or white TGIC polyester powder coat – 5-stage pre-treatment; Salt spray test: 1,000 hours; Reflectance: 92%.

SOCKETS: Shock-resistant sockets with gasketed internal locking collar to ensure positive lamp retention.

HARDWARE: One Type 302 stainless steel Phillips head fastener secures lens in housing channel.

ELECTRICAL: Class P ballast. Fluorescent electronic 120/277 or 347 voltage ballasts, high power factor.

WARRANTY: Limited one (1) year Kenall fluorescent warranty. [Peace of Mind Guarantee against breakage.](#)

LISTINGS: UL and CUL listed for Wet Location – covered ceiling. UL and CUL listed for Damp Location – horizontal wall mount. Optional UL and CUL Listed for Wet Location (WW Option) – horizontal wall mount. Optional UL certified IP65 per IEC 60598 (IP65 Option) – ceiling mount. Standard Hazardous Location Listings include Class I, Division 2, Groups A, B, C, D. Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.



ORDERING INFORMATION (Ex: HES5-48-2-32-IS-1-DV-2H-PP-FS)

Model	Length	Lamp Qty/Lamp Type	Ballast Type	Ballast Qty	Voltage	Housing	Lens Type	Options
-------	--------	--------------------	--------------	-------------	---------	---------	-----------	---------

HES5

Nominal Length

- 24 2' (60.96cm)
- 36 3' (91.44cm)
- 48 4' (121.92cm)
- 96 8' (243.84cm)

Lamp Qty/Type

- 2' Lengths (60.96cm)**
- 1-17 F17T8
- 2-17 F17T8
- 1-31U F31T8 - 1.62"U (4.11cm)
(one lamp only)

3' Lengths (91.44cm)

- 1-25 F25T8
- 2-25 F25T8

4' Lengths (121.92cm)

- 1-32 F32T8
- 2-32 F32T8

8' Lengths (243.84cm)

- (Lamp Qty per 4' (121.922m) Cross Section)
- 1-32 F32T8
- 2-32 F32T8

Ballast Type

- IS Elec <10% THD Instant Start
- RS Elec <10% THD Rapid Start
- SB Specified Ballast

Ballast Quantity

- 1 One
- 2 Two

Voltage

- DV 120-277 Volts
- 347 347 Volt

Housing Options

- 2H 20-Ga CRS; Painted
- P5H 20-Ga 304SS; Painted
- 5H 20-Ga 304SS; Brushed
- PXH 20-Ga 316SS; Painted
- XH 20-Ga 316SS; Brushed

Lens Type

- PP Pearlescent Polycarbonate
- CP Clear Polycarbonate

Options

- FS Single Fuse & Holder (n/a with 347V)
- IP65**† UL certified IP65 – Ceiling Mount
(w/removable end caps – not suitable for continuous row mount)
- PM▲ Pendant Mount (damp only) – suspension hardware by others
(must be installed in accordance with all local codes)
- TN 5/7/9 Watt Twin Tube NPF Night Light
- WW**† UL/CUL Wet Location Listing – Horizontal Wall Mount
(w/removable end caps – not suitable for continuous row mount)
- TR Tamper Resistant Torx® Fastener (1)

** n/a with 96" (243.84cm) version

▲ Consult factory for pendant mount hole locations.

† Add .375" (.95cm) to overall length

HAZARDOUS LOCATION T-RATINGS			
Lamp Type/Qty.	Mount	Option	Operating/Temp Code
F17T8/2	Wall/Ceiling	FS	85° C / T6
F17T8/2	Wall/Ceiling	TN & FS	160° C / T3C
F25T8/2	Wall	TN & FS	160° C / T3C
F25T8/2	Wall/Ceiling	FS	85° C / T6
F25T8/2	Ceiling	TN & FS	215° C / T2D
F32T8/2	Wall/Ceiling	TN & FS	180° C / T3A
F32T8/2	Wall/Ceiling	FS	85° C / T6
FB031T8/1	Wall/Ceiling	FS	85° C / T6




www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of Legrand

ENVIROSEAL™


HES5 SERIES

DIMENSIONAL DATA

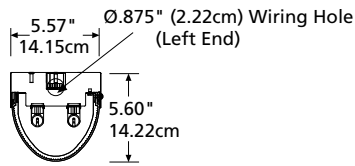

DIMENSIONAL DATA (IN INCHES & CENTIMETERS)

	A	B	C	D
HES524 – T8	3.00	16.00	24.75	
cm	7.62	40.64	62.87	
HES536 – T8	3.00	20.00	36.75	
cm	7.62	50.80	93.35	
HES548 – T8	3.00	32.00	48.75	
cm	7.62	81.28	123.83	
HES596 – T8	3.00	78.00	96.83	26.00
cm	7.62	198.12	245.95	66.04

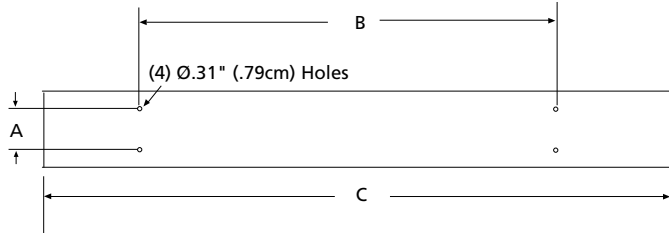

96" (243.84cm) BASEPLATE

