

MEDMASTER™ MRI DIMMING FILTER

MRIFD-1A SERIES

PRODUCT FEATURES:

- » Remote-mounted EMI filter compatible with all Kenall MRI luminaires
- » Filter provides >100dB attenuation from 14kHz to 10 GHz on 0-10V Dimming Circuits



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

MECHANICAL: Sealed plated steel construction with removable shielded cover for input connections through (3) 7/8" knock-outs. Rear-facing NPT threaded conduit pipe for output connections via flexible cable.


ELECTRICAL: 1A maximum rating. DC input with 600VDC max. rating. Min. 100dB common-mode attenuation between 14 kHz and 10 GHz.

INSTALLATION: Filter must be installed in direct-contact with the exterior wall of the MRI shield enclosure using provided hardware. The 0-10V dimmer must be installed outside of the shielded MRI environment. Suitable for installation in ambient temperature conditions between 0°C and 40°C.

LISTINGS: cULus Listed to UL1012.



DIMENSIONAL DATA

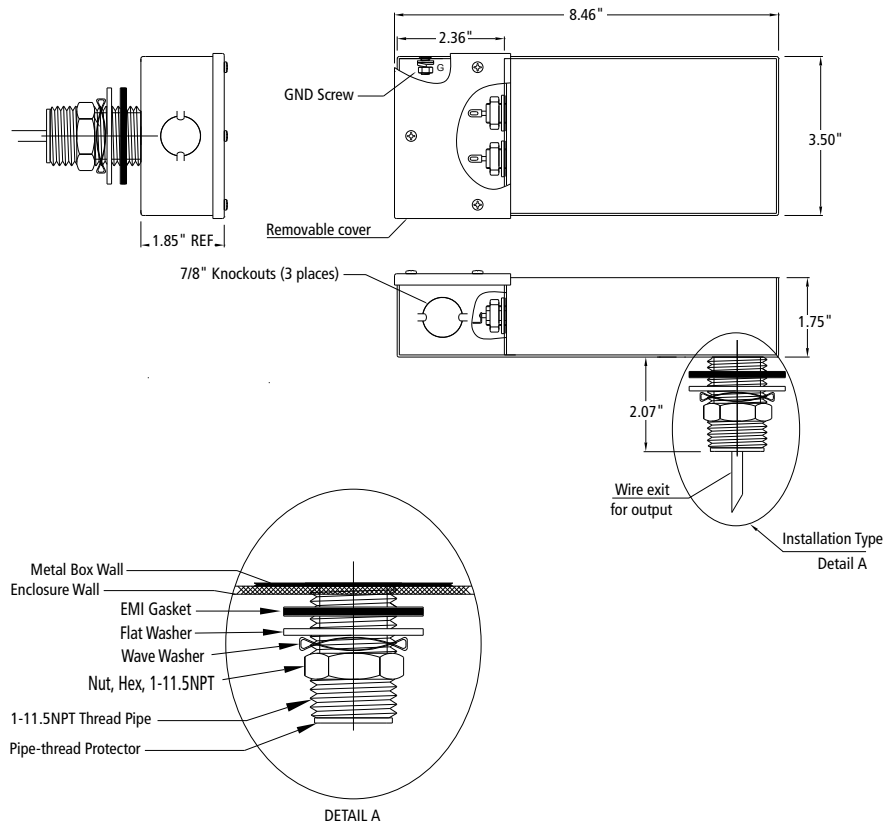

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.