

SHERIFF™

SH12 SERIES

PRODUCT FEATURES:

- » Surface mount – wall or ceiling; 12" x 48"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

BASEPLATE: One-piece, 16-gauge CRS baseplate and seam welded end caps. Baseplate provided with six-point mounting holes and one wireway hole. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. See Options for alternative materials and finishes. Lens positioned in baseplate channels and retained with stainless steel Torx® fasteners. Baseplate/end caps mount flush to ceiling or wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® T-20 with center pin fasteners secure lens in baseplate channel.

ELECTRICAL: **LED:** Available 3000K 3500K, 4000K and 5000K color temperatures, 82 CRI. 120-277VAC AND 347VAC, 50/60Hz electrical input with serviceable high power factor electronic, constant-current driver (<20% THD, >0.95 PF). Standard 0-10V dimming with 1-100% range and dim-to-dark capabilities. 330µA max. source current. Optional embedded microwave motion sensor (MS) has factory default settings of 20 minute time out, dims down to 30%. **LE:** Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

SENSOR & CONTROLS: Optional sensor available with compatible third party controls. To see the full list of compatible controls, [click here](#).

INSTALLATION: Six-point mounting required for Peace of Mind Guarantee®.

WARRANTY: Limited five (5) year warranty for LED lamps. [Peace of Mind Guarantee against breakage](#).

LISTINGS: UL and CUL listed for Wet Location – covered ceilings only. UL and CUL listed for Damp Locations – wall mount. ADA compliant. Suitable for installation into -40°C to 40°C ambient environments, unless otherwise noted. Luminaire tested to an IK10 impact protection rating per IEC 60068-2-75:1997-08.



ORDERING INFORMATION (Ex: SH12-48-1-67L40K-DCC-DV)

Model	Nom. Length	Lamp Qty	Lamp Type	Ballast/Driver	Ballast/Driver Qty	Voltage	Options
SH12	48						
Nominal Length			Lamp Type			Voltage	
48	4'		45L30K 45 Watt 3000K LED			120 120 Volt	
			45L35K 45 Watt 3500K LED			277 277 Volt	
			45L40K 45 Watt 4000K LED			347 347 Volt	
			45L50K 45 Watt 5000K LED			DV 120-277 Volts	
Lamp Quantity•			67L30K 67 Watt 3000K LED				Options
2	Two Lamps		67L35K 67 Watt 3500K LED				EL• Standard Lumen Battery Pack (32°F one-lamp operation)
3	Three Lamps		67L40K 67 Watt 4000K LED				PEL• High Lumen Battery Pack (32°F one-lamp operation)
4	Four Lamps		67L50K 67 Watt 5000K LED				.187 .187" P12 Polycarbonate Lens
			90L30K 90 Watt 3000K LED				OP Opal Polycarbonate Lens
			90L35K 90 Watt 3500K LED				AL Marine Grade Aluminum Housing
			90L40K 90 Watt 4000K LED				BSS Brush Stainless Steel Housing
			90L50K 90 Watt 5000K LED				PSS Painted Stainless Steel Housing
			28* F28T5				FS Single Fuse & Holder
			32 F32T8				KO Two 1/2" EMT Conduit Entry Knockouts (one per end cap)
			54* F54T5HO				DLN LED Night Light w/Light Level Control (100% - 20% dimming; voltage-specific selection required; n/a with 347V)
			Ballast/Driver Type				PM Pendant Mount
			IS Instant Start Electronic <10% THD (T8)				MS Motion Sensor (4' LED Only; n/a with 347V)
			RS Rapid Start Electronic <10% THD (T8, T5, T5HO)				
			SB Specified Ballast				
			DCC 0-10V Dimming LED Driver (LED only)				
			Ballast/Driver Quantity				* Available with two/three lamps only.
			1 One				• n/a with LED
			2• Two				



www.kenall.com | P: 800-4-Kenall | F: 262-891-9700 | 10200 55th Street Kenosha, Wisconsin 53144, USA
 This product is able to comply with the latest domestic preference legislation, such as the Buy American Act (BAA), Trade Agreement Act (TAA), Build America, Buy America Act (BABA), and others. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2024 Kenall Mfg. Co.

A brand of **Legrand**

SHERIFF™


SH12 SERIES

PERFORMANCE

Lamp Type	Initial Delivered Lumens		Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (Hrs)
	@ 25°C (lm)	Efficacy (lm/W)			
45L30K	4,667	97	48	100	80,000
45L35K	4,811	100			
45L40K	4,975	104			
45L50K	5,315	111			
67L30K	7,129	99	72	75	60,000
67L35K	7,349	102			
67L40K	7,600	106			
67L50K	8,120	113			
90L30K	9,161	96	95	100	80,000
90L35K	9,444	99			
90L40K	9,766	103			
90L50K	10,434	110			

Information subject to change without notice. Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For photometric data, please go to www.kenall.com

Model: SH12-48-90L40K-DCC-1-DV

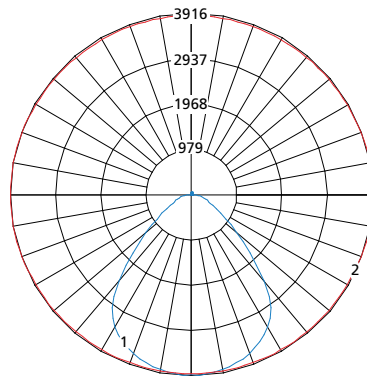


Maximum Candela = 3916 Located At Horizontal Angle = 75, Vertical Angle = 2.5

- 1 - Vertical Plane Through Horizontal Angles (75-265) (Through Max. Cd.)
- 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

DIMENSIONAL DATA

CROSS SECTION



MOUNTING HOLES

