

MILLENIUM FINITE™

FN SERIES

PRODUCT FEATURES:

- » Full cut-off LED wall-pack with classic design aesthetic
- » Type II, III and IV optical distribution options
- » High-efficiency, high-power LED sources
- » Available two-circuit and cold-weather battery pack options
- » Peace of Mind Guarantee®



FN9

FN15

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: High-impact resistant, UV-stabilized injection molded polycarbonate. Marine-grade die-cast aluminum driver housing.

DOOR: High-impact resistant, UV-stabilized injection molded polycarbonate with detachable hinge. Secured to housing with four (4) captive, recessed Torx® (or optional Phillips head) stainless steel screws. Lens sealed with closed-cell silicone gasket and secured to door frame with heavy gauge stainless steel brackets.

GASKETING: Closed cell, silicone "O" ring gasket seals joint between polycarbonate housing and die-cast aluminum driver housing and joint between polycarbonate housing and polycarbonate lens frame assembly. Thick gauge, die-cut, closed cell neoprene with self-adhesive gasket seals joint between housing and mounting surface or accessory surface conduit adapter.

ELECTRICAL: Serviceable high-brightness LED array. See Ordering Information for color temperature and CRI options. 70 CRI minimum. 120-277 VAC or 347VAC 50/60Hz single-phase input; constant-current dimming driver; <10% THD, >0.95 PF. Minimum 85% electrical efficiency. 0-10V dimming protocol with 1-100% range, 200µA source current. Replaceable surge suppressor rated to 10kA/kV per IEEE/ANSI C62.41 Cat. A. EMC compliant with FCC 47 CFR Part 15, Class A.

INSTALLATION: Fixture is factory pre-wired and includes gasketed, 16-gauge stainless steel quick mounting plate. Once four-point mounted to wall (required for Peace of Mind Guarantee®) or accessory surface conduit adapter, allows quick mounting with hook-and-lock mechanism. Quick mounting plate bolts to wall (fasteners by other), fixture attaches to mounting plate with two (2) captive Torx® (or optional Phillips head) screws, which are concealed but accessible from bottom. Suitable for ambient temperature applications from -40°C (-40°F) to 40°C (104°F) environments, except as noted.

SURFACE CONDUIT ADAPTER (ACCESSORY): Marine-grade die-cast aluminum construction includes die-cut gaskets and two 3/4" threaded connection ports. Once four-point mounted to wall (required for Peace of Mind Guarantee®) allows same quick mounting (hook-and-lock) capability as described in the Installation section above.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: One (1) year warranty against defects in materials and workmanship. Five (5) year warranty on LED lamps and driver for defects resulting in a fixture lumen depreciation of 30% or greater.

LISTINGS: Luminaire is certified to UL Standards by either Underwriters Laboratory or Intertek Testing Laboratory for Wet Location. UL certified IP65 per IEC 60598. IESNA-designated full cut-off.



In Stock SKU
FN9-4-7-DB-16L-40K7-DV
FN15-4-7-DB-47L-40K7-DV

ORDERING INFORMATION (Ex: FN9-4-7-MB-24L-40K8-DV)

Model	Optic System	Lens Type	Finish	Lamp Power	Lamp Color	Voltage	Options	Accessories
7								

Model

- FN9 9" Full Cutoff
- FN15 15" Full Cutoff

Optic System

- 2 Type II
- 3 Type III
- 4 Type IV

Lens Type

- 7 .187" Clear Polycarbonate

Finish

- DB Dark Bronze
- MB Matte Black
- MW Matte White
- CC Custom Color (Consult factory)

Lamp Power

- 9" 16 Watt LED
- 24L 24 Watt LED
- 15" 24 Watt LED
- 24L 36 Watt LED
- 47L 47 Watt LED
- 49L 49 Watt LED

Lamp Color

- 40K7 4000K, 70 CRI
- 40K8 4000K, 80 CRI
- 50K7 5000K, 70 CRI

Voltage

- DV 120-277 Volts
- 120 120 Volts
- 277 277 Volts
- 347 347 Volts

Options

- CEL† Integral Cold Weather Battery Pack (-20°C to 35°C ambient temp range)
- LEL† Integral Emergency Battery Pack (0°C to 35°C ambient temp range)
- FS Single Fuse & Holder
- PH Phillips Head Fasteners
- 2C* Two-Circuit Wiring

Accessories

- 9500 Torx® Screwdriver
- SA Die-Cast Surface Adapter

† Available only with FN15-24L model (cannot be combined with 347V or 2C options)

* Available only with FN15-24L and 49L models. Option provides separately powered drivers/LED modules



www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2016 Kenall Mfg. Co. All rights reserved.

FN_9_15-021417

MILLENIUM FINITE™


FN SERIES – Technical Data

PERFORMANCE

Model	Lamp Type	Initial Delivered Lumens (lm)			Efficacy (lm/W)	Input Power (W)	Drive Current (mA)	Estd. L70 LED Life (hrs)
		Type 2	Type 3	Type 4				
FN9	16L-40K7	1855	2100	2078	93-105	20	350	150,000
	16L-40K8	1788	2024	2003	89-101	20	350	150,000
	16L-50K7	1968	2228	2204	98-111	20	350	150,000
	24L-40K7	2598	2942	2911	96-109	27	350	125,000
	24L-40K8	2573	2914	2883	95-108	27	350	125,000
	24L-50K7	2756	3121	3088	102-116	27	350	125,000
FN15	24L-40K7	2823	3186	3169	101-114	28	350	150,000
	24L-40K8	2789	3148	3131	100-112	28	350	150,000
	24L-50K7	2995	3380	3362	107-121	28	350	150,000
	36L-40K7	4071	4594	4570	99-112	41	525	125,000
	36L-40K8	3984	4497	4473	97-110	41	525	125,000
	36L-50K7	4279	4830	4804	104-118	41	525	125,000
	47L-40K7	5073	5726	5695	92-104	55	700	100,000
	47L-40K8	5016	5661	5630	91-103	55	700	100,000
	47L-50K7	5383	6075	6042	98-110	55	700	100,000
	49L-40K7	5543	6256	6222	102-116	54	350	150,000
	49L-40K8	5425	6123	6090	100-113	54	350	150,000
	49L-50K7	5881	6637	6601	109-123	54	350	150,000

Information above was tested with the Clear Polycarbonate lens. Subject to change without notice. Visit www.kenall.com for IES files and additional information.


Model: FN15-2-7-DB-49L-40K8-DV



Maximum Candela = 3526 Located At Horizontal Angle = 80, Vertical Angle = 70

— 1 - Vertical Plane Through Horizontal Angles (80-260) (Through Max. Cd.)
 — 2 - Horizontal Cone Through Vertical Angle (70) (Through Max. Cd.)


Model: FN15-3-7-DB-49L-40K8-DV



Maximum Candela = 2635 Located At Horizontal Angle = 65, Vertical Angle = 67.5

— 1 - Vertical Plane Through Horizontal Angles (65-245) (Through Max. Cd.)
 — 2 - Horizontal Cone Through Vertical Angle (67.5) (Through Max. Cd.)

Model: FN15-4-7-DB-49L-40K8-DV



Maximum Candela = 2501 Located At Horizontal Angle = 35, Vertical Angle = 65

— 1 - Vertical Plane Through Horizontal Angles (35-215) (Through Max. Cd.)
 — 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)



www.kenall.com



P: 800-4-Kenall

F: 262-891-9701


10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2016 Kenall Mfg. Co. All rights reserved.


MILLENIUM FINITE™
FN SERIES – Technical Data
DIMENSIONAL DATA

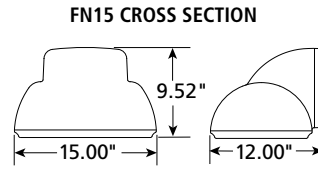


MOUNTING HOLES




MOUNTING HOLES



SURFACE ADAPTER



SURFACE ADAPTER

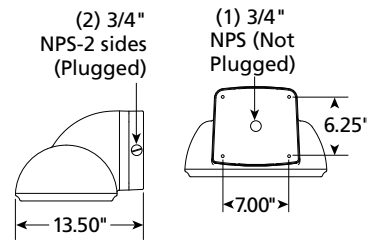

www.kenall.com

P: 800-4-Kenall

F: 262-891-9701

10200 55th Street Kenosha, Wisconsin 53144

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. May be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2016 Kenall Mfg. Co. All rights reserved.